


5,08 mm TRIPLE-DECK 3 COLORED RAIL-MOUNT TERMINAL BLOCK



Production Code : RTKS-R 5,08-3x10

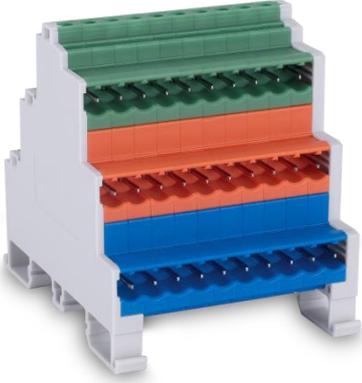

GENERAL ORDERING DATA

Type	5,08 mm Triple-Deck 3 Colored Rail-Mount Terminal Block –Pin 10
Qty	25 pcs
Order no	16.5010
Package weight	2,90 kg
Packaging	Box
Min. Order Qty	25 pcs
Country of origin	TURKEY

CERTIFICATES

CERTIFICATE	ISSUED BY
TS EN IEC 60947-7-4	TSE
CE	SZUTEST CO.
RoHS	İNTERTEK A.Ş.
EAC	SERCONS
DOMESTIC GOODS C.	TOBB-ISO
ISO 9001	SZUTEST CO.
ISO 14001	SZUTEST CO.
ISO 45001	SZUTEST CO.
ISO 10002	SZUTEST CO.

TECHNICAL DATA

DIMENSIONS

Width	55,31 mm
Height	64,26 mm
Depth	68,41 mm

ELECTRICAL DATA

Pin Range	5,08 mm/0,2 inch
Material Group	IIIa
Pollution Degree	2
Rated Current	16 A
Rated Voltage	250 V
Rated Impulse Voltage	4 kV

CONNECTION DATA

Conductor Connection Direction	90° - 180°
Solid Conductor	0,25...2,5 mm ² 23...14 AWG
Fine-Stranded Conductor	0,25...2,5 mm ² 23...14 AWG
Fine-Stranded Conductor With Ferules	0,25...1,5 mm ² 23...16 AWG
Stripping Length	7 mm

MATERIAL DATA

Insulation Material	PA66
Flammability Class Per	UL 94:V2
Screw Material	Chrome Zinc Stainles Steel (ZnCr)
Clamping Yoke	CK45 Steel
Pin&Contact Material	Brass
Pin&Contact Plating	Silver-Plated

MECHANICAL DATA

Screw	M2,5
Recommended Torque	0,40 Nm
Pin Dimensions	1x1 mm

ENVIRONMENTAL REQUIREMENTS


Operating Temperature Range	-40°C ... 100° C -40 ... + 212 ° F
-----------------------------	---------------------------------------

AVAILABLE PIN RANGES

2-12 PIN

Can be multiplied up to the desired number of poles by interlocking.

TECHNICAL DRAWINGS

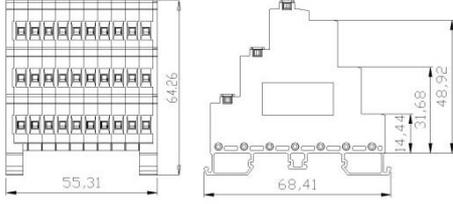

COMBINE PRODUCTS

5,08 mm SBDK-D (10.202-11.2010-12.2010)



5,08 mm SBDK-DD (10.252-11.2510-12.2510)



5,08 mm Multi-Color Modular Female (16.2010)

