


## 5,08 mm TRIPLE-DECK 3 COLORED RAIL-MOUNT TERMINAL BLOCK

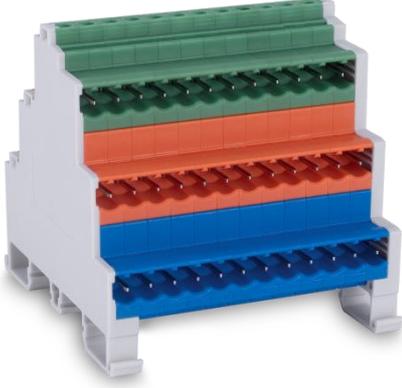

### GENERAL ORDERING DATA

Type	5,08 mm Triple-Deck 3 Colored Rail-Mount Terminal Block –Pin 12
Qty	20 pcs
Order no	16.5012
Package weight	2,80 kg
Packaging	Box
Min. Order Qty	20 pcs
Country of origin	TURKEY

Production Code : RTKS-R 5,08-3x12



### CERTIFICATES

CERTIFICATE	ISSUED BY
TS EN IEC 60947-7-4	TSE
CE	SZUTEST CO.
RoHS	İNTERTEK A.Ş.
EAC	SERCONS
DOMESTIC GOODS C.	TOBB-ISO
ISO 9001	SZUTEST CO.
ISO 14001	SZUTEST CO.
ISO 45001	SZUTEST CO.
ISO 10002	SZUTEST CO.

## TECHNICAL DATA

### DIMENSIONS

Width	65,47 mm
Height	64,26 mm
Depth	68,41 mm

### ELECTRICAL DATA

Pin Range	5,08 mm/0,2 inch
Material Group	IIIa
Pollution Degree	2
Rated Current	16 A
Rated Voltage	250 V
Rated Impulse Voltage	4 kV

### CONNECTION DATA

Conductor Connection Direction	90° - 180°
Solid Conductor	0,25...2,5 mm <sup>2</sup> 23...14 AWG
Fine-Stranded Conductor	0,25...2,5 mm <sup>2</sup> 23...14 AWG
Fine-Stranded Conductor With Ferules	0,25...1,5 mm <sup>2</sup> 23...16 AWG
Stripping Length	7 mm

### MATERIAL DATA

Insulation Material	PA66
Flammability Class Per	UL 94:V2
Screw Material	Chrome Zinc Stainles Steel (ZnCr)
Clamping Yoke	CK45 Steel
Pin&Contact Material	Brass
Pin&Contact Plating	Silver-Plated

### MECHANICAL DATA

Screw	M2,5
Recommended Torque	0,40 Nm
Pin Dimensions	1x1 mm

### ENVIRONMENTAL REQUIREMENTS


Operating Temperature Range	-40°C ... 100° C -40 ... + 212 ° F
-----------------------------	---------------------------------------

### AVAILABLE PIN RANGES

#### 2-12 PIN

Can be multiplied up to the desired number of poles by interlocking.

## TECHNICAL DRAWINGS

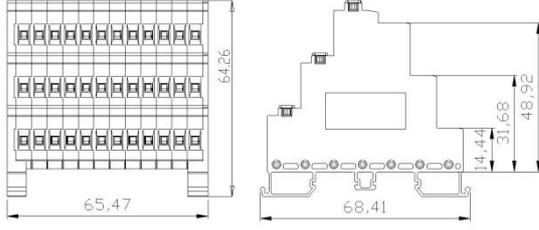

## COMBINE PRODUCTS

**5,08 mm SBDK-D (10.202-11.2012-12.2012)**



**5,08 mm SBDK-DD (10.252-11.2512-12.2512)**



**5,08 mm Multi-Color Modular Female (16.2012)**

